

广州尚帮商用电器设备有限公司
Guangzhou Shangbang Commercial Electrical Equipment Co., Ltd.



Wechat



WhatsApp



Email: info@shangbangcee.com

Tel: +86 13316215165

广州市番禺区桥南街康正街6号之一101
No. 6-1 Kangzheng Street, Qiaonan Street,
Panyu district, Guangzhou, China

Click to Website: www.shangbangcee.com
Click to Youtube: www.youtube.com/@Shangbangcee

本册图片、参数及相关信息仅供参考，实际产品以实物为准。最终解释权归广州尚帮商用电器设备有限公司所有。
For reference only. Final interpretation rights reserved by Guangzhou Shangbang Commercial Electrical Equipment Co., Ltd.

所有版权 ©2015-2026 广州尚帮商用电器设备有限公司

©2015-2026 Guangzhou Shangbang Commercial Electrical Equipment Co., Ltd.

SHANGBANG

2026 · 尚帮产品目录

2026 · 第二版

2026 产品目录 CATALOGUE

专注商用烹饪设备 · 高效出品更稳定

Commercial Cooking Expertise · Efficient & Consistent Output



Wechat



WhatsApp

智造厨房价值：高效·可靠·智能

Creating Kitchen Value: Efficient · Reliable · Intelligent

广州尚帮商用电器设备有限公司

Guangzhou Shangbang Commercial Electrical Equipment Co., Ltd.

© 2026 广州尚帮商用电器设备有限公司 版权所有 © 2026 Guangzhou Shangbang Commercial Kitchen Equipment Co., Ltd. All rights reserved.

品牌简介

BRAND INTRODUCTION

广州尚帮商用电器设备有限公司

专注于西餐商用厨房设备的研发与生产，产品涵盖炸炉、扒炉、保温展示柜、煎饺机、等加热类设备。公司始终以“安全、稳定、高效”为核心设计理念，持续提升设备的加工工艺与用户体验。

我们拥有完善的钣金制造体系和严格的品质检测流程，每一台设备均经过多道工序检验，确保在高强度的商用环境中保持长期可靠运行。凭借专业化的生产能力与灵活的定制服务，我们已为多类餐饮连锁、食品加工企业以及海外客户提供高品质的商用厨房设备解决方案。

Guangzhou Shangbang Commercial Electrical Equipment Co., Ltd.

Specialized in the R&D and manufacturing of Western-style commercial kitchen equipment, our product range covers fryers, griddles, warming displays, dumping makers, and other heating equipments. Guided by the core principles of safety, stability, and efficiency, we continuously enhance our production processes and user experience

With a complete sheet-metal fabrication system and a strict quality-control workflow, every unit undergoes multiple inspections to ensure long-term reliability in demanding commercial environments. Our professional production capability and flexible customization services enable us to provide high-quality equipment solutions for restaurant chains, food-processing facilities, and overseas clients.



Guangzhou Shangbang Commercial Electrical Equipment Co., Ltd.

Manufacturing Capability Center 实力制造中心

广州市番禺区桥南街康正街6号之一101

Shop 101, No. 6-1 Kangzheng Street, Qiaonan Street, Panyu district, Guangzhou



- 1 完整的钣金生产体系**
覆盖激光切割、折弯、冲压、焊接等核心工序
Complete Sheet-Metal Manufacturing System
Including laser cutting, bending, stamping, and welding
- 2 专业化装配与调试流程**
包含通电测试、温控测试、耐久测试等步骤
Strict Quality Inspection Standards
Serious Tests of Power-on, Temperature Control, Durability
- 3 严格的品质检验标准**
可按客户需求调整容量、结构、控制方式等
Flexible Product Customization
Capacity, structure, and control options can be tailored to client needs

- 4 大规模生产能力**
标准化作业路径，确保每台设备稳定运行
Professional Assembly & Calibration Workflow
Standardized procedures ensure stable and consistent performance
- 5 支持多规格产品定制**
车间布局精简高效，可满足批量订单交付
Large-Scale Production Capability
Efficient workshop layout ensures bulk manufacturing
- 6 支持多规格产品定制**
符合国际商用厨房设备规范，多国客户合作经验
Export-Grade Manufacturing Standards
Years of experience of exporting to overseas customers



尚帮立式炸炉系列

SHANGBANG ELECTRIC FRYER

SHANGBANG 尚帮电炸炉立式系列, 致力于为专业厨房提供精准、节能、稳定的多样化烹饪方案。系列涵盖三种控制系统:

- 机械控温款 —— 结构可靠, 操作简便, 满足基础炸制需求;
- 数显控温款 —— 实时显示油温, 掌控火候更直观;
- 智能电脑款 —— 一键设定时间与温度, 多段程序自动烹饪, 出品更标准化。

精准的温控系统与智能烹饪逻辑, 让新手快速上手, 熟手更高效稳定。无论何种型号, 都能实现一致的出品口感与专业级品质

Shangbang Electric Fryer Series
Designed to provide professional kitchens with precise, energy-efficient, and consistent frying solutions.
The series offers three control options:

- Mechanical Control Model — Reliable structure, easy operation, ideal for standard frying needs.
 - Digital Display Model — Real-time oil temperature display for more accurate heat control.
 - Smart Computerized Model — One-touch time and temperature settings with multi-stage automatic frying programs for standardized results.
- With accurate temperature control and intelligent cooking logic, new users can master operation quickly, while professionals achieve greater efficiency and stability. Each model delivers consistent taste and professional-grade performance

*产品规格及设计如有变更, 恕不另行通知; 产品外观以实物为准, 以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



温控系统 简介

TEMPERATURE CONTROL SYSTEM



【机械款】机械可靠·操作简便

- 1.机械旋钮控制，反应直接清晰
- 2.无复杂电路，减少故障率，维护更轻松
- 3.开机即热，无需预设程序

【Mechanical Type】Reliable Mechanics · Easy Operation

- ①.Mechanical knob control with clear, responsive feedback.
- ②.No complex circuitry, fewer failures, and easier maintenance.
- ③.Heats up instantly upon startup — no preset program required.

【数显款】油温显示·精准控温

- 1.数字温控显示，温度精确到 1℃
- 2.操作更简便，减少人为误差
- 3.油温波动小，口感一致

【Digital Display Type】Precise Temperature Control

- ①.Digital temperature control display, accurate to 1℃.
- ②.Easier operation, reducing error.
- ③.Minimal oil temperature fluctuation for consistent results.



【智能款】一键融油·预设菜单

- 1.一键融油，快速加热
- 2.内置多种预设菜单
- 3.LED显示，操作简单直观

【Smart Type】One-Touch Oil Melting · Preset Menus

- ①.One-touch oil melting for rapid heating.
- ②.Built-in preset menus for various frying options.
- ③.LED display for simple and intuitive operation.

功能特点 | Features

- ◎纵向深缸设计，油容量大，适合批量炸制
- ◎高温稳定，油温波动小，口感均匀
- ◎立式设计，占地小，适合大中小型厨房
- ◎前置控制面板，操作简便直观
- ◎不锈钢机身耐油耐腐蚀，结构稳固
- ◎配备过热保护、干烧防护和温控保护系统
- ◎底部阀门设计，可快速排出油液，减少清理时间
- ◎发热管可后翻，清理油渣更加轻松
- ◎指示灯显示工作状态，一目了然
- ◎防滑脚垫设计，工作稳定安全

- ◎ Vertical deep-tank design with large oil capacity, ideal for batch frying.
- ◎ Stable high temperature with minimal oil fluctuation for consistent frying results.
- ◎ Space-saving free-standing design, suitable for small to large kitchens.
- ◎ Front-mounted control panel for easy and intuitive operation.
- ◎ Stainless steel body, oil-resistant, corrosion-resistant, and structurally robust.
- ◎ Equipped with overheat protection, dry-heating prevention, and temperature control safety systems.
- ◎ Bottom drain valve design allows quick oil disposal, reducing cleaning time.
- ◎ Flippable heating tube for easier cleaning of oil residues.
- ◎ LED indicators provide a clear visual of operational status.
- ◎ Non-slip feet design for stable and safe operation.



单、双槽可选 Available in single or double tank options.

容量可选:20升, 30升, 40升, 50升, 60升... Available in multiple capacities: 20L, 30L, 40L, 50L, 60L, and more.

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

产品细节 展示 PRODUCT DETAILS DISPLAY



方便炸篮挂钩横杆

Fryer basket hook



精密加大放油阀

快速排油，节省操作时间

Precision enlarged oil drain valve for quick draining, saving operation time



大容量油缸设计

可同时炸制更多食材

Large-capacity oil tank design allows frying more food at once



高效节能发热管

热量均匀，炸制更均匀

High-efficiency, energy-saving heating tube with even heat distribution for more uniform frying



*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数仅供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

Model Table



产品型号 Model	EF001-JX01	EF001-JX06	EF001-JX02	EF001-JX07	EF001-JX03	EF001-JX05
名称 Name	单槽机械款立式电炸炉 Single-tank mechanical free standing electric fryer	双槽机械款立式电炸炉 Double-tank mechanical free standing electric fryer	单槽机械款立式电炸炉 Single-tank mechanical free standing electric fryer	双槽机械款立式电炸炉 Double-tank mechanical free standing electric fryer	单槽机械款立式电炸炉 Single-tank mechanical free standing electric fryer	单槽机械款立式电炸炉 Single-tank mechanical free standing electric fryer
产品尺寸 Product Size WxDxH (mm)	350×600×960	670×600×960	450×600×960	870×600×960	550×600×960	650×600×960
烹饪区域 Cooking Area WxDxH (mm)	290×400×190	290×400×190*2	390×400×190	390×400×190*2	490×400×190	590×400×190
容量 Capacity (Liter)	20L	20L*2	30L	30L*2	40L	50L
电压/频率 Voltage & Frequency	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz
额定功率 Rated Power (kw)	5KW/7.5KW	5KW*2/7.5KW*2	6KW/7.5KW	6KW*2/7.5KW*2	7.5KW/9KW	9KW
控制方式 CTL	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control
预存菜单 Menu No.	/	/	/	/	/	/
防水等级 IPRating	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
温度范围 Temperature range	60~200℃	60~200℃	60~200℃	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	660×410×930	740×660×930	660×510×930	940×600×930	660×610×930	730×660×930
净重 Net Weight (kg)	25	46.5	28.5	47	32.5	35
毛重 Gross Weight (kg)	27.5	49	31.5	51.5	35.5	38



产品型号 Model	EF001-SX01	EF001-SX07	EF001-SX02	EF001-SX08	EF001-SX03	EF001-SX05
名称 Name	单槽数显款立式电炸炉 Single-tank digital free standing electric fryer	双槽数显款立式电炸炉 Double-tank digital free standing electric fryer	单槽数显款立式电炸炉 Single-tank digital free standing electric fryer	双槽数显款立式电炸炉 Double-tank digital free standing electric fryer	单槽数显款立式电炸炉 Single-tank digital free standing electric fryer	单槽数显款立式电炸炉 Single-tank digital free standing electric fryer
产品尺寸 Product Size WxDxH (mm)	350×600×960	670×600×960	450×600×960	870×600×960	550×600×960	650×600×960
烹饪区域 Cooking Area WxDxH (mm)	290×400×190	290×400×190*2	390×400×190	390×400×190*2	490×400×190	590×400×190
容量 Capacity (Liter)	20L	20L*2	30L	30L*2	40L	50L
电压/频率 Voltage & Frequency	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz
额定功率 Rated Power (kw)	5KW/7.5KW	5KW*2/7.5KW*2	6KW/7.5KW	6KW*2/7.5KW*2	7.5KW/9KW	9KW
控制方式 CTL	定时设置 Time setting	定时设置 Time setting	定时设置 Time setting	定时设置 Time setting	定时设置 Time setting	定时设置 Time setting
预存菜单 Menu No.	/	/	/	/	/	/
防水等级 IPRating	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
温度范围 Temperature range	60~200℃	60~200℃	60~200℃	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	660×410×930	740×660×930	660×510×930	940×600×930	660×610×930	730×660×930
净重 Net Weight (kg)	25	46.5	28.5	47	32.5	35
毛重 Gross Weight (kg)	27.5	49	31.5	51.5	35.5	38

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数仅供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

智能立式电炸炉
INTELLIGENT VERTICAL ELECTRIC FRYER



预制菜单出餐更高效

Preset menus boost serving efficiency

标准化烹饪流程，出餐更稳定

Standardized cooking process for more consistent output



Model Table

产品规格表



产品型号 Model	EF001-ZN01	EF001-ZN07	EF001-ZN02
名称 Name	单槽智能款立式电炸炉 Single-Tank Smart Free Standing Electric Fryer	双槽智能款立式电炸炉 Double-Tank Smart Free Standing Electric Fryer	单槽智能款立式电炸炉 Single-Tank Smart Free Standing Electric Fryer
产品尺寸 Product Size WxDxH (mm)	350×600×960	670×600×960	450×600×960
烹饪区域 Cooking Area WxDxH (mm)	290×400×190	290×400×190*2	390×400×190
容量 Capacity (Liter)	20L	20L*2	30L
电压/频率 Voltage & Frequency	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz
额定功率 Rated Power (kw)	5KW/7.5KW	5KW*2/7.5KW*2	6KW/7.5KW
控制方式 CTL	智能预设 Smart presets	智能预设 Smart presets	智能预设 Smart presets
预存菜单 Menu No.	4	4	4
防水等级 IPRating	IPX4	IPX4	IPX4
温度范围 Temperature range	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	660×410×930	740×660×930	660×510×930
净重 Net Weight (kg)	25	46.5	28.5
毛重 Gross Weight (kg)	27.5	49	31.5



EF001-ZN08	EF001-ZN03	EF001-ZN06
双槽智能款立式电炸炉 Double-Tank Smart Free Standing Electric Fryer	单槽智能款立式电炸炉 Single-Tank Smart Free Standing Electric Fryer	单槽智能款立式电炸炉 Single-Tank Smart Free Standing Electric Fryer
870×600×960	550×600×960	650×600×960
390×400×190*2	490×400×190	590×400×190
30L*2	40L	50L
220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz
6KW*2/7.5KW*2	7.5KW/9KW	9KW
智能预设 Smart presets	智能预设 Smart presets	智能预设 Smart presets
4	4	4
IPX4	IPX4	IPX4
60~200℃	60~200℃	60~200℃
940×660×930	660×610×930	730×660×930
47	32.5	35
51.5	35.5	38

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



美式智能款电炸炉

AMERICAN-STYLE SMART DEEP FRYER


功能特点 | Features

- ◎ 搭载独立滤油车，实现油液自动过滤循环
- ◎ 深槽冷区有效沉降食材碎渣
- ◎ 长形结构提升有效炸油面积
- ◎ 高功率加热系统，升温迅速、回温快
- ◎ 智能温控系统，精准控温不糊锅
- ◎ 配备过热保护、干烧防护和温控保护系统
- ◎ 发热管可后翻，方便清洗与维护
- ◎ 12种预设菜单，新手也能稳定出品
- ◎ 万向轮灵活移动，厨房布局更省力

- ◎ Equipped with an independent filtration cart for automatic oil filtering and circulation
- ◎ The deep cold zone effectively traps and settles food debris
- ◎ The elongated design increases the effective frying surface area
- ◎ High-power heating system for rapid heating and quick recovery
- ◎ Intelligent temperature control system ensures precise heat regulation and prevents burning
- ◎ Features overheat, dry-boil, and temperature control protection
- ◎ Flippable heating element for easy cleaning and maintenance
- ◎ 12 preset menus for consistent results, perfect for beginners
- ◎ 360° casters for easy mobility and effortless kitchen setup



商用大功率加热
Commercial High-Power Heating

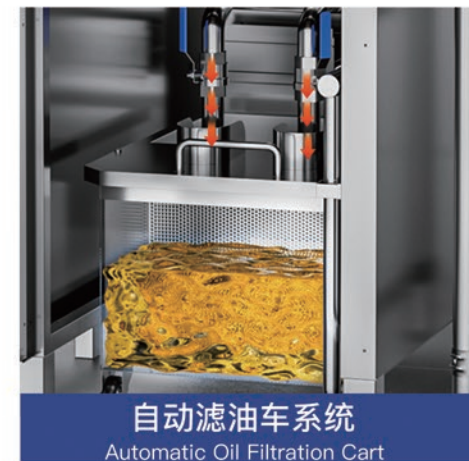

自动滤油车系统
Automatic Oil Filtration Cart





深槽冷区结构
Deep Cold-Zone Design



12种预制菜单
新手也能炸出标准口味

12 Preset Menus Standardized flavor, even for beginners

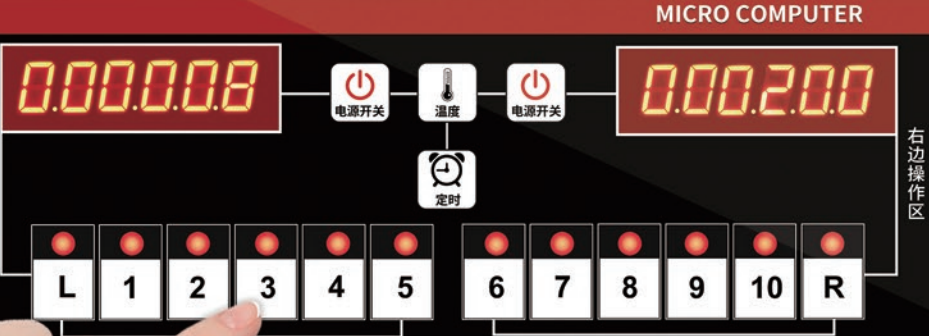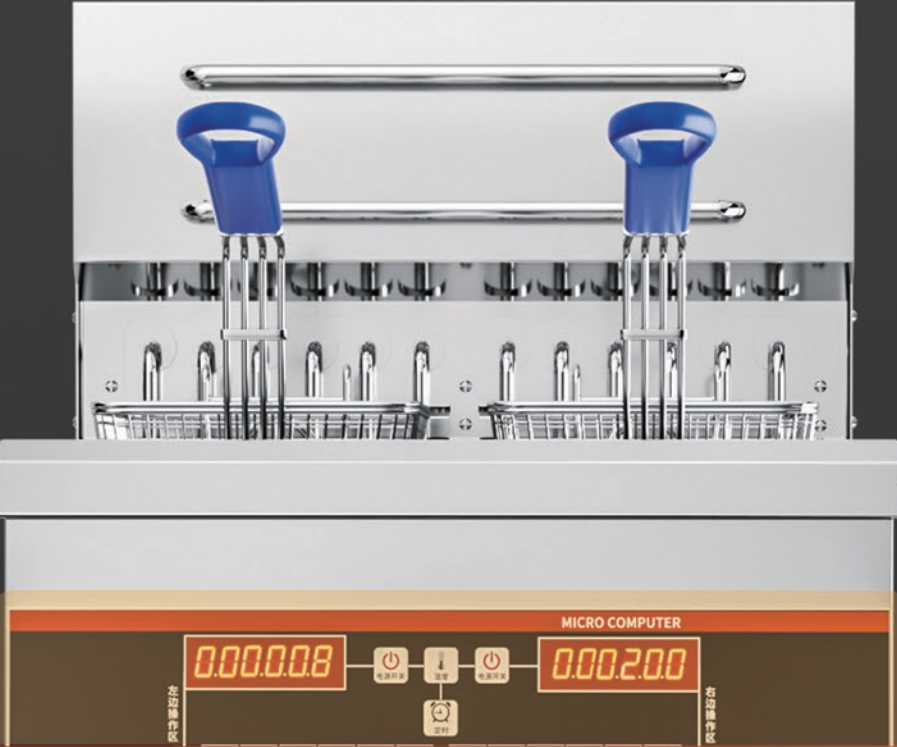

Model Table
产品规格表



产品型号 Model	EF002-A1-1	EF002-A1-2
名称 Name	单槽美式电炸炉 Single-Tank American-Style Deep Fryer	双槽美式电炸炉 Double-Tank American-Style Deep Fryer
产品尺寸 Product Size WxDxH (mm)	400x800x1040	400x800x1040
烹饪区域 Cooking Area WxDxH (mm)	350x530x180	350x530x180
容量 Capacity (Liter)	28L	14L*2
电压/频率 Voltage & Frequency	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz
额定功率 Rated Power (kw)	9KW/18KW	9KW/18KW
控制方式 CTL	智能预设 Smart presets	智能预设 Smart presets
预存菜单 Menu No.	12种预设菜单 12preset menus	12种预设菜单 12preset menus
防水等级 IPRating	IPX4	IPX4
温度范围 Temperature range	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	440x850x910	440x850x910
净重 Net Weight (kg)	42	43
毛重 Gross Weight (kg)	44.5	45.5



产品型号 Model	EF002-B1-1	EF002-B1-2
名称 Name	单槽美式带滤油车款炸炉 Single-Tank American-Style Deep Fryer with Oil Filtration Cart	双槽美式带滤油车款炸炉 Double-Tank American-Style Deep Fryer with Oil Filtration Cart
产品尺寸 Product Size WxDxH (mm)	400x800x1090	400x800x1090
烹饪区域 Cooking Area WxDxH (mm)	350x530x180	350x530x180
容量 Capacity (Liter)	28L	14L*2
电压/频率 Voltage & Frequency	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz
额定功率 Rated Power (kw)	9KW/18KW	9KW/18KW
控制方式 CTL	智能预设 Smart presets	智能预设 Smart presets
预存菜单 Menu No.	12种预设菜单 12preset menus	12种预设菜单 12preset menus
防水等级 IPRating	IPX4	IPX4
温度范围 Temperature range	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	440x850x910	440x850x910
净重 Net Weight (kg)		
毛重 Gross Weight (kg)		

高效降本 滤油车

HIGH-EFFICIENCY COST-SAVING OIL FILTER CART



自动循环过滤

Automatic circulation filtration

通过循环式过滤结构，将油渣与杂质及时分离，让炸油保持清澈
Using a circulation-based filtration system, it separates residues and impurities in time, keeping the frying oil clearer and ensuring more consistent product quality

功能特点 | Features

- ◎ 高效过滤系统，延长油液使用周期
- ◎ 自动循环过滤，保持油质更清澈
- ◎ 减少油耗成本，提升日常运营效率
- ◎ 加厚不锈钢机身，耐用易清洁
- ◎ 热油过滤更安全，降低人工倒油风险
- ◎ 可搭配多款炸炉，提升清洁效率
- ◎ High-efficiency filtration system extends oil lifespan
- ◎ Automatic circulation filtration maintains clearer oil quality
- ◎ Reduces oil consumption and improves daily operational efficiency
- ◎ Thickened stainless-steel body, durable and easy to clean
- ◎ Safer hot oil filtration, minimizes manual handling risks
- ◎ Compatible with various fryers, enhancing cleaning efficiency

Model Table

产品规格表



产品型号 Model	LYC-01	LYC-02	LYC-03
名称 Name	滤油车 Oil filtration cart	滤油车 Oil filtration cart	滤油车 Oil filtration cart
产品尺寸 Product Size WxDxH (mm)	905×380×590	850×415×615	890×420×360
油缸尺寸 Cooking Area WxDxH (mm)	390×708×232	390×708×232	630×355×220
容量 Capacity (Liter)	36L	48L	48L
电机功率 Motor power	3/4HP	3/4HP	1/2HP
油泵流量 Oil pump flow rate	32L/min	32L/min	12L/min
配套纸袋 Compatible paper bags(mm)	400×360	440×345	382×280
过滤密度 Filtration density	20um	20um	20um
包装尺寸 Packing Size WxDxH (mm)			
净重 Net Weight (kg)			
毛重 Gross Weight (kg)			

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

柜门款立式炸炉


CABINET-DOOR VERTICAL FRYER




功能特点 | Features

- ◎柜体一体式结构，稳固耐用
- ◎大容量油槽，适合高客流量
- ◎高功率加热系统，升温迅速
- ◎控温稳定，出品标准一致
- ◎超温限温器保护，油温过高自动断电
- ◎发热管可翻转设计，便于清洁油槽底部
- ◎底部大容量储物空间

- ◎ Integrated cabinet structure for enhanced stability and durability
- ◎ Large-capacity oil tank, ideal for peak periods
- ◎ High-power heating system for rapid heat-up
- ◎ Stable temperature control for consistent frying results
- ◎ Over-temperature limiter protection; automatically cuts off power when the oil temperature is too high
- ◎ Reversible heating element design for easy cleaning of the oil tank bottom
- ◎ Large-capacity storage space at the bottom

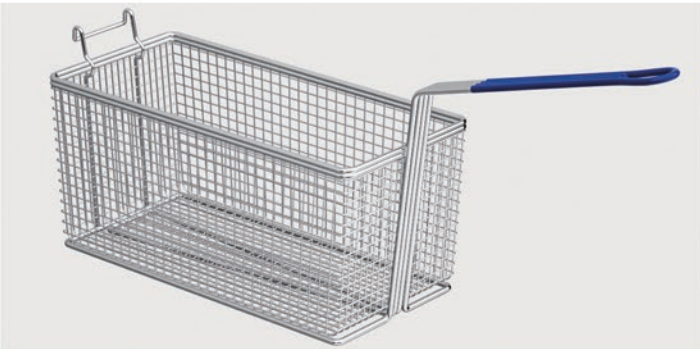

长方形滤网炸篮
Commercial Rectangular Mesh Fry Basket

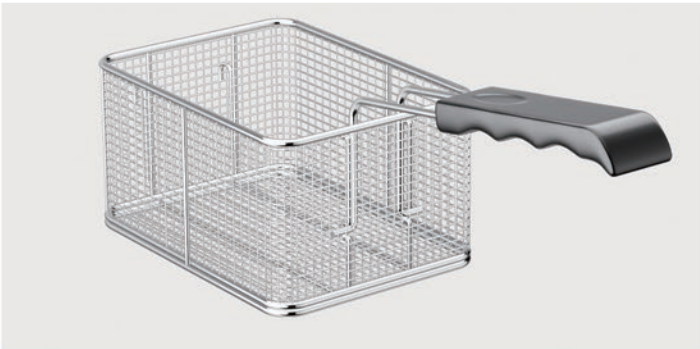

通用款炸篮
Commercial Universal Fry Basket



底部放油阀设计

- ①.操作简单，清理更轻松
- ②.节省清洁时间，提高工作效率
- ③.无需倾倒即可排油，安全卫生

Bottom Oil Drain Valve Design

- ①.Easy to Operate, Easier to Clean
- ②.Saves Cleaning Time, Boosts Work Efficiency
- ③.Drain Oil Without Tilting, Safe and Hygienic

精准探温针.实时监控油温

- ①.精准控温，确保食物出品一致
- ②.快速灵敏，油温变化即时感应
- ③.快速响应探针，防止油温过高或过低

Precision Temperature Probe

- ①.Precise Temperature Control for Consistently Perfect Results
- ②.Rapid and Responsive Oil Temperature Detection
- ③.Fast-Response Probe Prevents Overheating or Underheating of Oil



Model Table

产品规格表



产品型号 Model	EF003-A1	EF003-A2	EF003-A3	EF003-A4
名称 Name	单槽机械款立式电炸炉 Single-tank mechanical free standing electric fryer	单槽机械款立式电炸炉 Single-tank mechanical free standing electric fryer	单槽机械款立式电炸炉 Single-tank mechanical free standing electric fryer	双槽机械款立式电炸炉 Double-tank mechanical vertical electric fryer
产品尺寸 Product Size WxDxH (mm)	450×600×960	550×600×960	650×600×960	450×600×960
烹饪区域 Cooking Area WxDxH (mm)	390×410×23	490×410×230	590×410×230	390×410×230*2
容量 Capacity (Liter)	30L	40L	50L	30L*2
电压/频率 Voltage & Frequency	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz
额定功率 Rated Power (kw)	5KW/7.5KW	6KW/9KW	9KW	6.5KW*2/9KW*2
控制方式 CTL	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control
预存菜单 Menu No.	/	/	/	/
防水等级 IPRating	IPX4	IPX4	IPX4	IPX4
温度范围 Temperature range	60~200℃	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	660×510×930	660×610×930	730×660×930	660×510×930
净重 Net Weight (kg)	29.5	32	35.5	51.5
毛重 Gross Weight (kg)	32	/	/	/



产品型号 Model	EF003-B1	EF003-B2	EF003-B3	EF003-B4
名称 Name	单槽数显款立式电炸炉 Single-tank digital free standing electric fryer	单槽数显款立式电炸炉 Single-tank digital free standing electric fryer	单槽数显款立式电炸炉 Single-tank digital free standing electric fryer	双槽数显款立式电炸炉 Double-tank digital free standing electric fryer
产品尺寸 Product Size WxDxH (mm)	450×600×960	550×600×960	650×600×960	450×600×960
烹饪区域 Cooking Area WxDxH (mm)	390×410×23	490×410×230	590×410×230	390×410×230*2
容量 Capacity (Liter)	30L	40L	50L	30L*2
电压/频率 Voltage & Frequency	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz 380V/50Hz
额定功率 Rated Power (kw)	5KW/7.5KW	6KW/9KW	9KW	6.5KW*2/9KW*2
控制方式 CTL	定时设置Time setting	定时设置Time setting	定时设置Time setting	定时设置Time setting
预存菜单 Menu No.	/	/	/	/
防水等级 IPRating	IPX4	IPX4	IPX4	IPX4
温度范围 Temperature range	60~200℃	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	660×510×930	660×610×930	730×660×930	660×510×930
净重 Net Weight (kg)	29.5	32	35.5	51.5
毛重 Gross Weight (kg)	32	/	/	/

台式油阀款

ELECTRIC COUNTERTOP FRYER WITH DRAIN VALVE




功能特点 | Features

- ◎底部油阀设计，轻松排油，减少搬动整机
- ◎内置过滤挡片，有效分离油渣
- ◎机械旋钮控温，操作简单易用
- ◎不锈钢机身，耐腐蚀、耐用性好
- ◎配备过热保护、干烧防护和温控保护系统
- ◎配有油阀排油，更方便清洁
- ◎防滑脚垫设计，工作稳定安全



底部放油阀设计，轻松排油 · 清洁更省力
Bottom Oil Drain Valve Design Easy draining · Effortless cleaning

- ◎ Bottom oil drain valve design — easy oil draining without moving the entire fryer
- ◎ Built-in filter plate for effective separation of food residues
- ◎ Mechanical knob temperature control for simple and easy operation
- ◎ Stainless steel body, corrosion-resistant and highly durable
- ◎ Equipped with overheat protection, dry-burn prevention, and temperature control safety system
- ◎ Equipped with an oil drain valve for easier cleaning
- ◎ Non-slip feet design for stable and safe operation

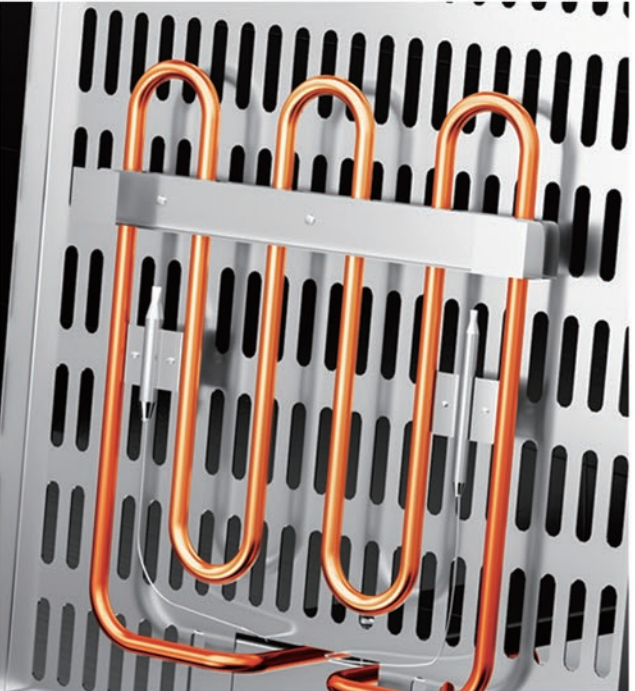

高效发热管结构，升温迅速 · 炸制更高效
Separates food residues from contacting the heating element



内置过滤挡片，有效分离油渣
Built-in filter plate for effective separation of food residues

Model Table
产品规格表



产品型号 Model	EF011-A1	EF011-A2	EF011-A3	EF011-A4	EF011-A5	EF011-A6
名称 Name	单槽油阀开关款台式炸炉 Single-Tank Countertop Fryer with Oil Drain Valve	单槽台式带油阀开关款炸炉 Single-Tank Countertop Fryer with Oil Drain Valve	单槽台式带油阀开关款炸炉 Single-Tank Countertop Fryer with Oil Drain Valve	双槽台式带油阀开关款炸炉 Double-Tank Countertop Fryer with Oil Drain Valve	双槽台式带油阀开关款炸炉 Double-Tank Countertop Fryer with Oil Drain Valve	双槽台式带油阀开关款炸炉 Double-Tank Countertop Fryer with Oil Drain Valve
产品尺寸 Product Size WxDxH (mm)	280×470×350	310×490×380	340×490×380	570×470×350	630×490×380	690×490×380
烹饪区域 Cooking Area WxDxH (mm)	210×300×190	230×300×190	260×300×190	210×300×180*2	230×300×190*2	290×300×190*2
容量 Capacity (Liter)	10L	13L	16L	10L*2	13L*2	16L*2
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	3KW	3.25KW	3.5KW	3KW*2	3.25KW*2	3.25KW*2
控制方式 CTL	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control
预存菜单 Menu No.	/	/	/	/	/	/
防水等级 IPRating	IPX3	IPX3	IPX3	IPX3	IPX3	IPX3
温度范围 Temperature range	60~200℃	60~200℃	60~200℃	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	570×335×400	570×365×400	570×390×400	635×565×400	695×565×400	755×565×400
净重 Net Weight (kg)	8		9.5			
毛重 Gross Weight (kg)	9.5		10.5			

Model Table
产品规格表



产品型号 Model	EF011-B1	EF011-B2	EF011-B3	EF011-B4	EF011-B5	EF011-B6
名称 Name	单槽油阀定时款台式炸炉 Single-Tank Fryer with Oil Drain Valve and Timer	单槽油阀定时款台式炸炉 Single-Tank Fryer with Oil Drain Valve and Timer	单槽油阀定时款台式炸炉 Single-Tank Fryer with Oil Drain Valve and Timer	双槽油阀定时款台式炸炉 Double-Tank Fryer with Oil Drain Valve and Timer	双槽油阀定时款台式炸炉 Double-Tank Fryer with Oil Drain Valve and Timer	双槽油阀定时款台式炸炉 Double-Tank Fryer with Oil Drain Valve and Timer
产品尺寸 Product Size WxDxH (mm)	280×470×350	310×490×380	340×490×380	570×470×350	630×490×380	690×490×380
烹饪区域 Cooking Area WxDxH (mm)	210×300×190	230×300×190	260×300×190	210×300×180*2	230×300×190*2	290×300×190*2
容量 Capacity (Liter)	10L	13L	16L	10L*2	13L*2	16L*2
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	3KW	3.25KW	3.5KW	3KW*2	3.25KW*2	3.5KW*2
控制方式 CTL	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control
预存菜单 Menu No.	/	/	/	/	/	/
防水等级 IPRating	IPX3	IPX3	IPX3	IPX3	IPX3	IPX3
温度范围 Temperature range	60~200℃	60~200℃	60~200℃	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	570×335×400	570×365×400	570×390×400	635×565×400	695×565×400	755×565×400
净重 Net Weight (kg)	8		9.5			
毛重 Gross Weight (kg)	9.5		10.5			

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数仅供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

台式油阀款PLUS

COUNTERTOP FRYER WITH OIL DRAIN VALVE



【定时烹饪】可预设炸制时间

- 1.精确控时：定时结束自动提醒或断电，炸制更均匀
- 2.节省人力：释放双手，适合忙碌的厨房高峰时段
- 3.安全可靠：避免长时间加热导致油温过高或食材炸糊

【Timed Cooking】 Allows preset frying time

- ①.Precisely timing: automatically alerts or shuts off when time is up for more evenly, frying
- ②.Labor-saving: free hands, ideal for peak hours
- ③.Safe and reliable: prevents overheating or over-frying from prolonged heating




【长方形款】加宽加大炸篮

- 1.长方形设计贴合油槽形状，充分利用油面空间
- 2.带手柄设计，操作安全，拆卸方便，清洁轻松
- 3.炸制更多食材适合长条或大份食材

【Rectangular Model】 Wide and Large Frying Basket

- ①.Mechanical knob control with clear, responsive feedback.
- ②.Rectangular design fits the oil tank shape, maximizing the usable oil surface area
- ③.Fry more food at once, ideal for long or large portions

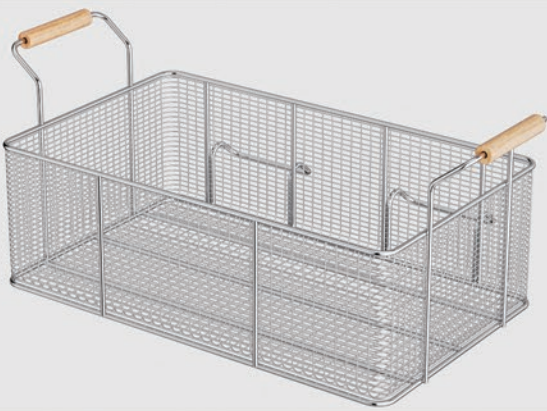

Model Table


产品规格表



产品型号 Model	EF021-A1	EF021-A1
名称 Name	加大单槽油阀定时款台式炸炉 Large Single-Tank Fryer with Oil Valve and Timer	加大单槽油阀定时款台式炸炉 Large Single-Tank with Oil Valve and Timer
产品尺寸 Product Size WxDxH (mm)	570×530×370	620×530×370
烹饪区域 Cooking Area WxDxH (mm)	500×345×215	550×345×215
容量 Capacity (Liter)	20L	30L
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	6KW	6KW
控制方式 CTL	机械操控 Mechanical control	机械操控 Mechanical control
预存菜单 Menu No.	/	/
防水等级 IPRating	IPX3	IPX3
温度范围 Temperature range	60~200°C	60~200°C
包装尺寸 Packing Size WxDxH (mm)	/	/
净重 Net Weight (kg)	17	18
毛重 Gross Weight (kg)	20	20

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

Model Table
产品规格表

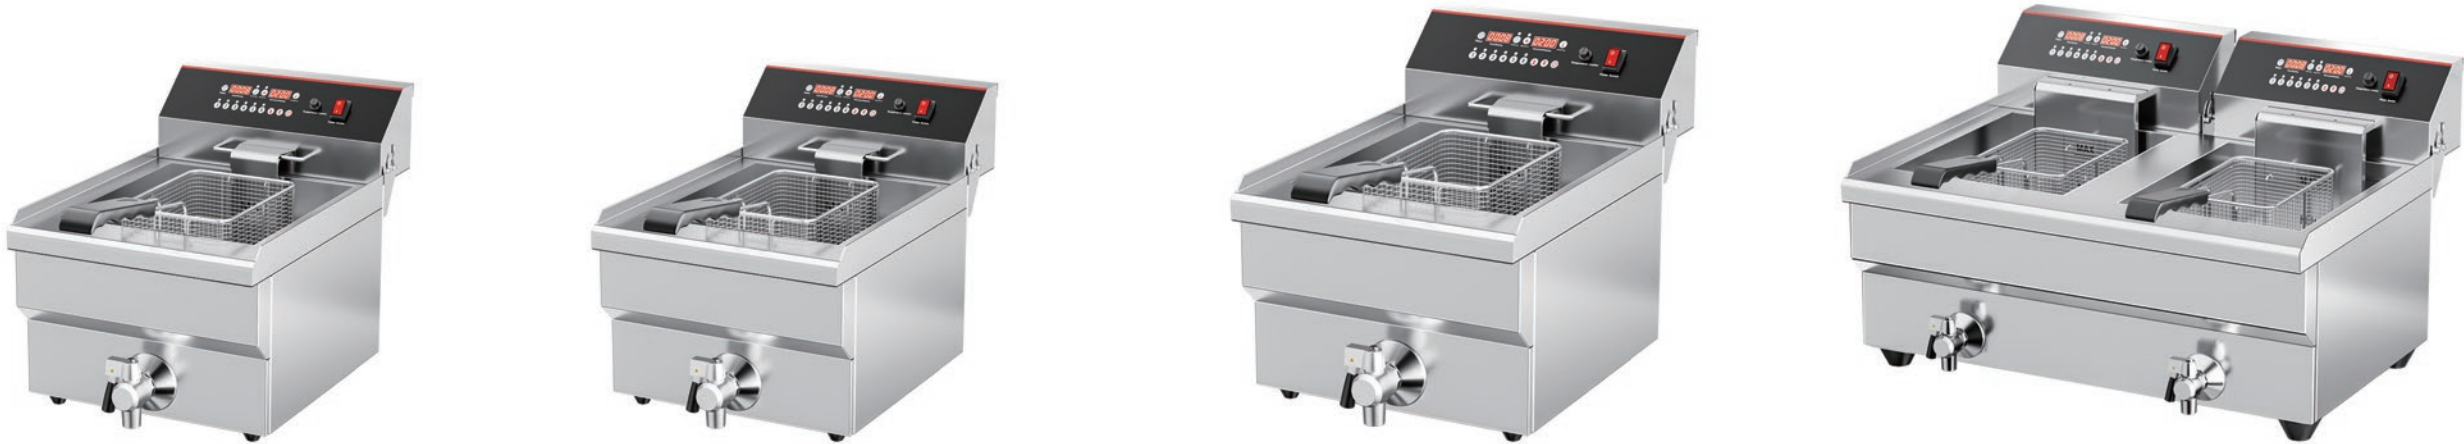

产品型号 Model	EF011-C1	EF011-C2	EF011-C3	EF011-C4
名称 Name	单槽油阀智能款台式炸炉 Single-Tank Smart Fryer with Oil Valve	单槽油阀智能款台式炸炉 Single-Tank Smart Fryer with Oil Valve	单槽油阀智能款台式炸炉 Single-Tank Smart Fryer with Oil Valve	双槽台式带油阀智能款炸炉 Double-Tank Smart Fryer with Oil Valve
产品尺寸 Product Size WxDxH (mm)	280×470×350	310×490×380	340×490×380	570×470×350
烹饪区域 Cooking Area WxDxH (mm)	210×300×190	230×300×190	260×300×190	210×300×180*2
容量 Capacity (Liter)	10L	13L	16L	10L*2
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	3KW	3.25KW	3.5KW	3KW*2
控制方式 CTL	智能操控 Smart Control	智能操控 Smart Control	智能操控 Smart Control	智能操控 Smart Control
预存菜单 Menu No.	6 Presets	6 Presets	6 Presets	6 Presets
防水等级 IPRating	IPX3	IPX3	IPX3	IPX3
温度范围 Temperature range	60~200℃	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	570×335×400	570×365×400	570×390×400	635×565×400
净重 Net Weight (kg)	8	/	9.5	/
毛重 Gross Weight (kg)	9.5	/	10.5	/



EF011-A5	EF011-A6	EF021-B1	EF021-B2
双槽台式带油阀智能款炸炉 Double-Tank Smart Fryer with Oil Valve	双槽台式带油阀智能款炸炉 Double-Tank Smart Fryer with Oil Valve	加大单槽油阀智能款台式炸炉 Large Single-Tank Smart Fryer with Oil Valve	加大单槽台式带油阀智能款炸炉 Large Single-Tank Smart Fryer with Oil Valve
630×490×380	690×490×380	570×530×370	620×530×370
230×300×190*2	290×300×190*2	500×345×215	550×345×215
13L*2	16L*2	20L	30L
220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
3.25KW*2	3.25KW*2	6KW	6KW
智能操控 Smart Control	智能操控 Smart Control	智能操控 Smart Control	智能操控 Smart Control
6 Presets	6 Presets	6 Presets	6 Presets
IPX3	IPX3	IPX3	IPX3
60~200℃	60~200℃	60~200℃	60~200℃
695×565×400	755×565×400	/	/
/	/	17	18
/	/	20	20

台式系列
COUNTERTOP SERIES

功能特点 | Features

- ◎ 经济实用设计，配置精简
- ◎ 发热管加热快，出餐效率更高
- ◎ 机械旋钮控温，操作简单易用
- ◎ 不锈钢机身，耐腐蚀、耐用性好
- ◎ 配备过热保护、干烧防护和温控保护系统
- ◎ 油槽可提出设计，更方便清洁
- ◎ 防滑脚垫设计，工作稳定安全



- ◎ Economical, practical design with a streamlined configuration
- ◎ Fast-heating element for improved serving efficiency
- ◎ Mechanical knob temperature control for simple and easy operation
- ◎ Stainless steel body, corrosion-resistant and highly durable
- ◎ Equipped with overheat protection, dry-burn prevention, and temperature control safety system
- ◎ Removable oil tank design for more easily cleaning
- ◎ Non-slip feet design for stable and safe operation



智能超温保护，自动监测温度
Smart overheat protection with automatic temperature monitoring



合理隔板设计，分隔碎渣接触发热管
Separate food residues from contacting the heating element

Model Table
产品规格表



产品型号 Model	EF017-A	EF017-E	EF017-F
名称 Name	单槽经济款台式电炸炉 Economy Single-Tank Countertop Electric Fryer	单槽经济款台式电炸炉 Economy Single-Tank Countertop Electric Fryer	单槽经济款台式电炸炉 Economy Single-Tank Countertop Electric Fryer
产品尺寸 Product Size WxDxH (mm)	270×320×290	270×320×340	325×445×340
烹饪区域 Cooking Area WxDxH (mm)	235×295×150	235×295×200	295×325×200
容量 Capacity (Liter)	10L	12L	15L
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	3KW	3.25KW	3.5KW
控制方式 CTL	/	/	/
预存菜单 Menu No.	/	/	/
防水等级 IPRating	IPX3	IPX3	IPX3
温度范围 Temperature range	60~200°C	60~200°C	60~200°C
包装尺寸 Packing Size WxDxH (mm)	475×325×320	475×325×360	500×380×380
净重 Net Weight (kg)	5.5	6	7
毛重 Gross Weight (kg)	6.5	7	8



EF018-B	EF018-E	EF018-F
双槽经济款台式电炸炉 Economy Double-Tank Countertop Electric Fryer	双槽经济款台式电炸炉 Economy Double-Tank Countertop Electric Fryer	双槽经济款台式电炸炉 Economy Double-Tank Countertop Electric Fryer
550×410×290	560×410×340	650×445×340
235×295×150*2	235×295×200*2	325×295×200*2
10L*2	12L*2	15L*2
220V/50Hz	220V/50Hz	220V/50Hz
3KW*2	3.25KW*2	3.5KW
/	/	/
/	/	/
IPX3	IPX3	IPX3
60~200°C	60~200°C	60~200°C
610×470×320	610×475×370	720×490×390
10	11.5	13
11.5	13	15

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

台式油槽提出款

COUNTERTOP FRYER WITH OIL DRAIN VALVE

功能特点 | Features

- 油槽可提出设计，清洗更轻松
- 分离式油槽结构，维护更方便
- 减少整机搬动，操作更省力
- 不锈钢机身，耐腐蚀、耐用性好
- 配备过热保护、干烧防护和温控保护系统
- 便于倒油与更换食用油
- 防滑脚垫设计，工作稳定安全

- Removable oil tank for more easily cleaning
- Detachable tank design for convenient maintenance
- Less need to move the entire unit, more user-friendly
- Stainless steel body, corrosion-resistant and highly durable
- Equipped with overheat protection, dry-burn prevention, and temperature control safety system
- Easy oil disposal and replacement
- Anti-slip feet design for stable and safe operation



【独立电源开关】

- 1.独立电源开关，操作更安全可控
- 2.快速启停，减少误操作风险
- 3.分离加热与电源控制，提升安全性

【Independent Power Switch】

- ①.Independent power switch for safer and more controlled operation
- ②.Quick on/off response to reduce misoperation risks
- ③.Separate power and heating control for enhanced safety



【可提出油槽设计】

- 1.可提出油槽，清洗更轻松
- 2.无需搬动整机，日常维护更省力
- 3.一体成型压铸，杜绝漏油

【Rectangular Model】 Wide and Large Frying Basket

- ①.Removable oil tank for more easily cleaning
- ②.No need to move the fryer, more effective mainenance
- ③.One-piece die-cast construction to prevent oil leakage



Model Table

产品规格表



产品型号 Model	EF014	EF015	EF016
名称 Name	单槽提出款台式炸炉 Single-Tank Fryer with Removable Oil Tank	单槽提出款台式炸炉 Single-Tank Fryer with Removable Oil Tank	单槽提出款台式炸炉 Single-Tank Fryer with Removable Oil Tank
产品尺寸 Product Size WxDxH (mm)	270×460×305	280×460×355	325×460×355
烹饪区域 Cooking Area WxDxH (mm)	235×295×150	240×300×190	300×325×190
容量 Capacity (Liter)	10L	12L	15L
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	3KW	3.25KW	4.5KW
控制方式 CTL	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control
预存菜单 Menu No.	/	/	/
防水等级 IPRating	IPX3	IPX3	IPX3
温度范围 Temperature range	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	510×332×340	510×340×380	540×400×380
净重 Net Weight (kg)	5.5	6.5	8
毛重 Gross Weight (kg)	6.5	7.5	9.5

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数仅供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

SHANGBANGSERIES 尚帮台式炸炉81系列

需求选配置 高性价比81系列

Select Options as Needed
Cost-Effective 81 Series



精准定时控制
Precisely timing control



灵敏探温针
超温限温器保护
Sensitive Temperature Probe
Over-temperature
limiter protection



商用大功率速热
Commercial high-power
rapid heating

台式81系列
COUNTERTOP 81 SERIES

功能特点 | Features

- ◎ 经济实用设计，配置精简
- ◎ 发热管加热快，出餐效率更高
- ◎ 机械旋钮控温，操作简单易用
- ◎ 不锈钢机身，耐腐蚀、耐用性好
- ◎ 配备过热保护、干烧防护和温控保护系统
- ◎ 油槽可提出设计，更方便清洁
- ◎ 防滑脚垫设计，工作稳定安全

- ◎ Economical, practical design with a streamlined configuration
- ◎ Fast-heating element for improved serving efficiency
- ◎ Mechanical knob temperature control for simple and easy operation
- ◎ Stainless steel body, corrosion-resistant and highly durable
- ◎ Equipped with overheat protection, dry-burn prevention, and temperature control safety system
- ◎ Removable oil tank design for easier cleaning
- ◎ Anti-slip feet design for stable and safe operation



便捷式炸篮挂钩
Convenient Fry Basket Hook



实时测温+限温保护
Temperature Control & Safety Protection

Model Table

产品规格表



产品型号 Model	EFO07-A	EFO07-B	EFO07-C
名称 Name	单槽经典款台式电炸炉 Classic Single-Tank Fryer	单槽定时款台式电炸炉 Single-Tank Fryer with Timer	单槽开关款台式电炸炉 Single-Tank Switch Fryer
产品尺寸 Product Size WxDxH (mm)	275×450×300	275×450×300	275×450×300
烹饪区域 Cooking Area WxDxH (mm)	240×290×150	240×290×150	240×290×150
容量 Capacity (Liter)	10L	10L	10L
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	2.5KW	2.5KW	2.5KW
控制方式 CTL	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control
预存菜单 Menu No.	/	/	/
防水等级 IPRating	IPX3	IPX3	IPX3
温度范围 Temperature range	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	510×320×340	510×320×340	510×320×340
净重 Net Weight (kg)	4.5	4.5	4.5
毛重 Gross Weight (kg)	5.5	5.5	5.5




EFO05-A2	EFO05-B2	EFO05-C2
长单槽经典款台式电炸炉 Classic Long Single-Tank Countertop Fryer	长单槽定时款台式电炸炉 Long Single-Tank Fryer with Timer	长单槽开关款台式电炸炉 Long Single-Tank Switch Fryer
345×600×300	345×600×300	345×600×300
300×50×150	300×50×150	300×50×150
22L	22L	22L
220V/50Hz	220V/50Hz	220V/50Hz
3KW	3KW	3KW
机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control
/	/	/
IPX3	IPX3	IPX3
60~200℃	60~200℃	60~200℃
720×385×340	720×385×340	720×385×340
7	7	7
8	8	8



EFO08-A	EFO08-B	EFO08-C
双槽经典款台式电炸炉 Classic Double-Tank Fryer	双槽定时款台式电炸炉 Double-Tank Fryer with Timer	双槽开关款台式电炸炉 Double-Tank Switch Fryer
550×400×300	550×400×300	550×400×300
240×290×150*2	240×290×150*2	240×290×150*2
10L*2	10L*2	10L*2
220V/50Hz	220V/50Hz	220V/50Hz
2.5KW*2	2.5KW*2	2.5KW*2
机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control
/	/	/
IPX3	IPX3	IPX3
60~200℃	60~200℃	60~200℃
600×505×340	600×505×340	600×505×340
8.5	8.5	8.5
10	10	10

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

台式炸炉81系列
81 SERIES COUNTERTOP FRYERS

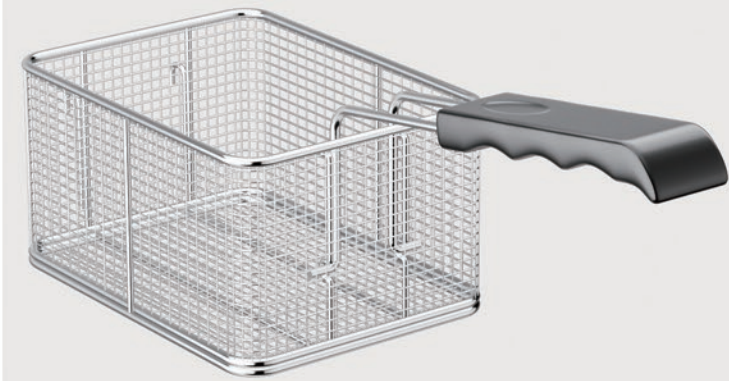


手握式炸篮 | Handheld Fry Basket

手握式设计，操作更灵活
Handheld Design for Flexible Operation
防烫握柄，端取更省力
Heat-Resistant Handle for Safe Grip
受力稳固，翻动不晃动
Stable Support for Easily Lifting and Turning

手提式炸篮 | Hand-Carry Fry Basket

手提式设计，端取轻松不烫手
Hand-Carry Design for Easy Lifting
稳固提手结构，承重更可靠
Reinforced Handle for Reliable Support
操作灵活，装卸食材更方便
Flexible Handling for Quickly Loading and Serving

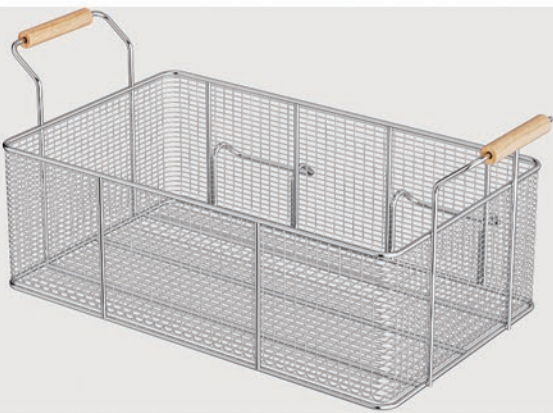

Model Table

产品规格表



产品型号 Model	EFO06-A	EFO06-B	EFO06-C
名称 Name	加宽单槽经典款台式电炸炉 Classic Widened Single-Tank Fryer	加宽单槽定时款台式电炸炉 Widened Single-Tank Fryer with Timer	加宽单槽开关款台式电炸炉 Widened Single-Tank Switch Fryer
产品尺寸 Product Size WxDxH (mm)	550×450×300	550×450×300	550×450×300
烹饪区域 Cooking Area WxDxH (mm)	500×300×150	500×300×150	500×300×150
容量 Capacity (Liter)	22L	22L	22L
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	2.5KW*2	2.5KW*2	2.5KW*2
控制方式 CTL	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control
预存菜单 Menu No.	/	/	/
防水等级 IPRating	IPX3	IPX3	IPX3
温度范围 Temperature range	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	600×505×340	600×505×340	600×505×340
净重 Net Weight (kg)	8.5	8.5	8.5
毛重 Gross Weight (kg)	10	10	10

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数仅供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

台式炸炉O系列

O SERIES COUNTERTOP FRYER



Model Table

产品规格表



产品型号 Model	EF021-C	EF022-C
名称 Name	单槽油阀升降款台式电炸炉 Smart Single-Tank Countertop Fryer with Oil Valve	单槽油阀升降款台式电炸炉 Smart Single-Tank Countertop Fryer with Oil Valve
产品尺寸 Product Size WxDxH (mm)	300×565×385	571×565×385
烹饪区域 Cooking Area WxDxH (mm)	/	/
容量 Capacity (Liter)	12L	15L
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	3.25KW	4KW
控制方式 CTL	智能操控 Smart Operation	智能操控 Smart Operation
预存菜单 Menu No.	5	5
防水等级 IPRating	IPX3	IPX3
温度范围 Temperature range	60~200°C	60~200°C
包装尺寸 Packing Size WxDxH (mm)		
净重 Net Weight (kg)		
毛重 Gross Weight (kg)		



产品型号 Model	EF023-C	EF024-C
名称 Name	双槽油阀升降款台式电炸炉 Smart Double-Tank Countertop Lifting Fryer	双槽油阀升降款台式电炸炉 Smart Double-Tank Countertop Lifting Fryer
产品尺寸 Product Size WxDxH (mm)	620×565×385	1162×565×385
烹饪区域 Cooking Area WxDxH (mm)	/	/
容量 Capacity (Liter)	12L*2	15L*2
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	3.25KW*2	4KW*2
控制方式 CTL	智能操控 Smart Operation	智能操控 Smart Operation
预存菜单 Menu No.	5	5
防水等级 IPRating	IPX3	IPX3
温度范围 Temperature range	60~200°C	60~200°C
包装尺寸 Packing Size WxDxH (mm)		
净重 Net Weight (kg)		
毛重 Gross Weight (kg)		

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

Model Table
产品规格表



产品型号 Model	EF021-A	EF022-A	EF023-A	EF024-A
名称 Name	单槽油阀智能台式电炸炉 Smart Single-Tank Countertop Electric Fryer	单槽油阀款智能台式电炸炉 Smart Single-Tank Countertop Electric Fryer	双槽油阀款智能台式电炸炉 Smart Double-Tank Countertop Electric Fryer	双槽油阀款智能台式电炸炉 Smart Double-Tank Countertop Electric Fryer
产品尺寸 Product Size WxDxH (mm)	300×565×385	571×565×385	620×565×385	1162×565×385
烹饪区域 Cooking Area WxDxH (mm)	/	/	/	/
容量 Capacity (Liter)	12L	15L	12L*2	15L*2
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	3.25KW	4KW	3.25KW*2	4KW*2
控制方式 CTL	智能操控 Smart Operation	智能操控 Smart Operation	智能操控 Smart Operation	智能操控 Smart Operation
预存菜单 Menu No.	5	5	5	5
防水等级 IPRating	IPX3	IPX3	IPX3	IPX3
温度范围 Temperature range	60~200℃	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)				
净重 Net Weight (kg)				
毛重 Gross Weight (kg)				

Model Table
产品规格表



产品型号 Model	EF021-B	EF022-B	EF023-B	EF024-B
名称 Name	单槽款智能台式电炸炉 Smart Single-Tank Electric Fryer with Oil Valve	单槽款智能台式电炸炉 Smart Single-Tank Electric Fryer with Oil Valve	双槽款智能台式电炸炉 Smart Double-Tank Electric Fryer with Oil Valve	双槽款智能台式电炸炉 Smart Double-Tank Electric Fryer with Oil Valve
产品尺寸 Product Size WxDxH (mm)	300×565×385	571×565×385	620×565×385	1162×565×385
烹饪区域 Cooking Area WxDxH (mm)	/	/	/	/
容量 Capacity (Liter)	12L	15L	12L*2	15L*2
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	3.25KW	4KW	3.25KW*2	4KW*2
控制方式 CTL	智能操控 Smart Operation	智能操控 Smart Operation	智能操控 Smart Operation	智能操控 Smart Operation
预存菜单 Menu No.	5	5	5	5
防水等级 IPRating	IPX3	IPX3	IPX3	IPX3
温度范围 Temperature range	60~200℃	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)				
净重 Net Weight (kg)				
毛重 Gross Weight (kg)				

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数仅供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

深缸冷区台式炸炉

COUNTERTOP ELECTRIC DEEP FRYER WITH COOL ZONE



功能特点 | Features

- ◎深缸冷区设计,延长油质使用寿命

◎加厚油槽容量大,可炸更多食材

◎快速升温发热管,热效高

◎精准温控系统,可自由设定温度

◎不锈钢机身坚固耐腐蚀

◎配备过热保护、干烧防护和温控保护系统

◎发热管可后翻,方便清洗与维护

◎指示灯显示工作状态,一目了然

◎防滑脚垫设计,工作稳定安全
- ◎ Deep tank with cool zone design, extending oil life

◎ Thickened large-capacity tank for frying more food at once

◎ High-efficiency heating tube for rapidly heating

◎ Front-mounted control panel for easy and intuitive operation.

◎ Precise temperature control system with adjustable setting

◎ Stainless steel body, sturdy and corrosion-resistant


◎ Equipped with overheat protection, dry-burn prevention, and temperature control safety system

◎ Indicator lights show operating status at a glance

◎ Anti-slip feet design for stable and safe operation



发热管 Heating tube

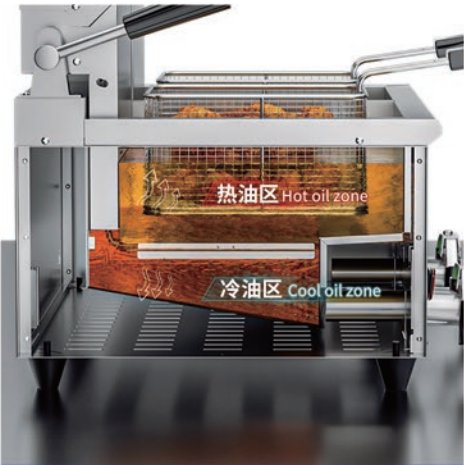

深缸冷区 Deep tank with cool zone



放油阀 Oil drain valve

Model Table

产品规格表



产品型号 Model	EF004-A1	EF004-A3	EF004-A4	EF004-A2
名称 Name	单槽机械款台式电炸炉 Single-Tank Countertop Mechanical Electric Fryer with Cool Zone	单槽机械款台式电炸炉 Single-Tank Countertop Mechanical Electric Fryer with Cool Zone	单槽机械款台式电炸炉 Single-Tank Countertop Mechanical Electric Fryer with Cool Zone	双槽机械款台式电炸炉 Double-Tank Countertop Mechanical Electric Fryer with Cool Zone
产品尺寸 Product Size WxDxH (mm)	350×530×483	450×530×480	550×530×480	670×530×483
烹饪区域 Cooking Area WxDxH (mm)	290×410×150	390×410×150	490×410×150	290×410×150*2
容量 Capacity (Liter)	12L	17L	30L	12L*2
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	4KW	5KW	6KW/7.5KW	4KW*2
控制方式 CTL	机械控温Mechanical control	机械控温Mechanical control	机械控温Mechanical control	机械控温Mechanical control
预存菜单 Menu No.	/	/	/	/
防水等级 IPRating	IPX4	IPX4	IPX4	IPX4
温度范围 Temperature range	60~200℃	60~200℃	60~200℃	60~200℃
包装尺寸 Packing Size WxDxH (mm)	715×400×510	720×500×510	720×610×510	725×685×510
净重 Net Weight (kg)	/	/	24	/
毛重 Gross Weight (kg)	/	/	25.5	/



EF004-B1	EF004-B3	EF004-B4	EF004-B2
单槽数显款台式电炸炉 Single-Tank Countertop Digital Electric Fryer with Cool Zone	单槽数显款台式电炸炉 Single-Tank Countertop Digital Electric Fryer with Cool Zone	单槽数显款台式电炸炉 Single-Tank Countertop Digital Electric Fryer with Cool Zone	双槽数显款台式电炸炉 Double-Tank Countertop Digital Electric Fryer with Cool Zone
350×530×483	450×530×480	550×530×480	670×530×483
290×410×150	390×410×150	490×410×150	290×410×150*2
12L	17L	30L	12L*2
220V/50Hz	220V/50Hz	220V/50Hz 380V/50Hz	220V/50Hz
4KW	5KW	6KW/7.5KW	4KW*2
数显控温 Digital thermostat	数显控温 Digital thermostat	数显控温 Digital thermostat	数显控温 Digital thermostat
/	/	/	/
IPX4	IPX4	IPX4	IPX4
60~200℃	60~200℃	60~200℃	60~200℃
715×400×510	720×500×510	720×610×510	725×685×510
/	/	24	/
/	/	25.5	/

*产品规格及设计如有变更,恕不另行通知;产品外观以实物为准,以上参数仅供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

903长型油槽炸炉

903LONG-TANK ELECTRIC FRYER



长油槽设计，适合长条或大份食材
Long tank design, ideal for long or large portions of food



旋钮调节设计，温度精准可靠
Rotary knob design for precise and reliable temperature control

功能特点 | Features

- ◎长型油槽设计，适合长条或大份食材
- ◎机械旋钮控温,操作简单，温度调节精准稳定
- ◎高效发热管，升温快、热效高
- ◎锈钢机身，坚固耐腐蚀，易清洁
- ◎配备过热保护、干烧防护和温控保护系统
- ◎油槽可提出设计，更方便清洁
- ◎防滑脚垫设计，工作稳定安全

- ◎ Long tank design, suitable for long or large portions of food
- ◎ Mechanical knob control for easy operation and precise, stable temperature adjustment
- ◎ High-efficiency heating tube for fast heating and superior thermal performance
- ◎ Stainless steel body, durable, corrosion-resistant, and easy to clean
- ◎ Equipped with overheat protection, dry-burn prevention, and temperature control safety system
- ◎ Removable oil tank design for more easily cleaning
- ◎ Anti-slip feet design for stable and safe operation



Model Table

产品规格表



产品型号 Model	EF010-A	EF010-B
名称 Name	单槽长型油槽款台式电炸炉 Single-tank long-tank countertop electric fryer	双槽长型油槽款台式电炸炉 Double-Tank Long-Basin Countertop Electric Fryer
产品尺寸 Product Size WxDxH (mm)	330×550×420	660×550×420
烹饪区域 Cooking Area WxDxH (mm)	255×370×240	255×370×240*2
容量 Capacity (Liter)	19L	19L*2
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	4.5KW	4.5KW*2
控制方式 CTL	机械操控 Mechanical control	机械操控 Mechanical control
预存菜单 Menu No.	/	/
防水等级 IPRating	IPX3	IPX3
温度范围 Temperature range	60~200°C	60~200°C
包装尺寸 Packing Size WxDxH (mm)	610×390×460	720×610×460
净重 Net Weight (kg)	9.5	17
毛重 Gross Weight (kg)	10.5	19

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数仅供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.


扒炉系列

ECONOMY SERIES FRYER



功能特点 | Features

- ◎采用高功率发热管，升温快、回温快
 - ◎全面均匀导热，食材熟度更一致
 - ◎50~300℃多档控温，适配多种料理
 - ◎厚煎板蓄热强，不怕食材频繁放入造成温降
 - ◎多区独立控温，同时处理不同食材
 - ◎前置接油槽，收集油渣油污，清洁更轻松
 - ◎防溅挡板，有效防油溅使用更安全
 - ◎不锈钢机身，抗油污、抗腐蚀耐用易清洁
-
- ◎ Using high-power heating tubes for fast heat-up and quick recovery
 - ◎ Uniform Heat Distribution for More Consistent Cooking
 - ◎ 50~300℃ multi-level temperature control, suitable for various dishes
 - ◎ Thick griddle retains heat, resisting temperature drops from frequent food loading
 - ◎ Multi-zone independent temperature control
 - ◎ Features overheat, dry-boil, and temperature control protection
 - ◎ Front-positioned oil tray collects grease and food residue
 - ◎ Splash guard effectively prevents oil splatter for safer use
 - ◎ Stainless steel body—resistant to grease and corrosion, durable and easy to clean

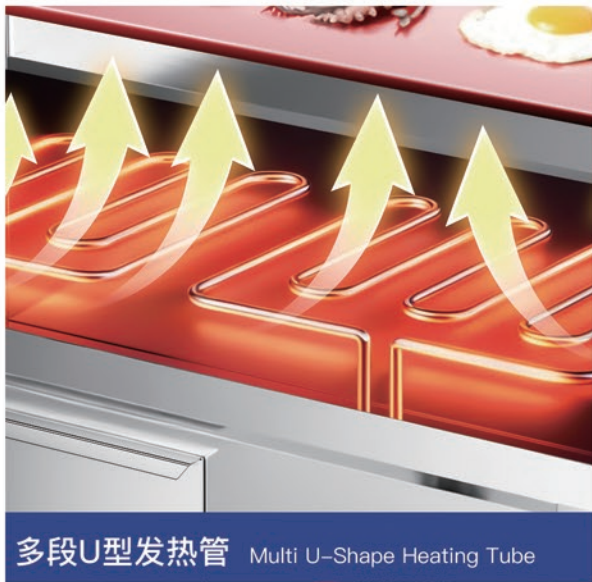

多段U型发热管 Multi U-Shape Heating Tube



加大接油仓 Enlarged oil collection chamber



Model Table
产品规格表



产品型号 Model	EG-0027	EG-0028	EG-0011
名称 Name	单温控电热扒炉 Single Temperature-Control Electric Griddle	双温控电热扒炉 Dual-temperature electric griddle	三温控电热扒炉 Triple-temperature electric griddle
产品尺寸 Product Size WxDxH (mm)	550×440×230	730×490×230	922×600×380
煎板尺寸 Griddle Plate Size(mm)	550×350	730×400	920×490
煎板厚度 Griddle Plate Thickness(mm)	8MM/10MM	8MM/10MM	16MM
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz	380V/50Hz
额定功率 Rated Power (kw)	3KW	4.4KW	12KW
控制方式 CTL	机械操控Mechanical control	机械操控Mechanical control	机械操控Mechanical control
预存菜单 Menu No.	/	/	/
防水等级 IPRating	IPX3	IPX3	IPX3
温度范围 Temperature range	50~300℃	50~300℃	50~300℃
包装尺寸 Packing Size WxDxH (mm)	640×520×305	810×570×310	/
净重 Net Weight (kg)	22	32	76
毛重 Gross Weight (kg)	24	34	/



EG-0016	EG-0029	EG-0030
四温控电热扒炉 Four-temperature electric griddle	双温控镀铬煎板槽满焊款扒炉 Dual-temperature chrome-plated griddle with fully welded groove	三温控镀铬煎板槽满焊款扒炉 Triple-temperature chrome-plated griddle with fully welded groove
1220×605×425	730×455×230	922×600×380
1200×490	730×400	920×490
16MM	8MM/10MM	16MM
380V/50Hz	220V/50Hz	380V/50Hz
12KW	4.4KW	12KW
机械操控Mechanical control	机械操控Mechanical control	机械操控Mechanical control
/	/	/
IPX3	IPX3	IPX3
50~300℃	50~300℃	50~300℃
/	810×570×310	/
100.5	32	76
/	34.5	/

自动煎饺机
HIGH-EFFICIENCY DUMPLING COOKER

功能特点 | Features

- 智能温控时,自动调节煎制温度和时间
- 一键启动简单操作，轻松开启烹饪模式
- 加热板受热均匀，煎制成品金黄酥脆
- 防粘易清洁 ,优质不粘涂层，清洗方便省力
- 液压伸缩杆设计, 加长手柄，防烫省力
- 多功能烹饪可煎饺、煎包、蛋饼等多种食材
- 智能控温系统，更省电，煎制更稳定
- Intelligent temperature & time control for precise cooking
- One-touch start – simple operation for effortless cooking
- Evenly heated cooking plate ensures golden and crispy results
- High-quality non-stick coating for easy, hassle-free cleaning
- Hydraulic telescopic handle – extended design for safe, effortless operation
- Multi-purpose cooking – perfect for dumplings, buns, pancakes, etc
- Smart thermostat system saves energy and delivers consistent results



产品型号 Model	HW-PS-001	HW-PS-002
名称 Name	全自动单头煎饺机 Fully Automatic Single-Tank Dumpling Cooker	全自动双头煎饺机 Fully Automatic Double-Tank Dumpling Cooker
产品尺寸 Product Size WxDxH (mm)	300×590×450	300×590×450
煎板尺寸 Griddle Plate Size(mm)	210×320×50	210×320×50
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	3KW	3KW*2
控制方式 CTL	全自动Fully Automatic	全自动Fully Automatic
预存菜单 Menu No.	/	/
防水等级 IPRating	IPX3	IPX3
温度范围 Temperature range	50~300℃	50~300℃
包装尺寸 Packing Size WxDxH (mm)	/	/
净重 Net Weight (kg)	/	/



全自动牛排机

FULLY AUTOMATIC STEAK GRILL


一键全自动烹饪
One-Touch Automatic Cooking
宽域温控范围，持续保持稳定温度，适配不同牛排厚度与熟度需求
Wide temperature range with stable heat control, suitable for different steak thicknesses and doneness levels

功能特点 | Features

- ◎预设煎制程序，轻松实现标准化出餐
 - ◎一键自动煎制，减少人工看火
 - ◎多档火力与时间调节，适配不同熟度
 - ◎不锈钢机身，坚固耐腐蚀，易清洁
 - ◎预热迅速，缩短等待时间
 - ◎具备限温保护、手柄隔热、工作指示提示等设计
 - ◎多场景适用餐厅后厨、档口小吃、牛排快餐店
-
- ◎Preset cooking programs for easy, standardized output.
 - ◎One-touch automatic searing, reducing the need for manual monitoring.
 - ◎Multiple heat and time settings to suit different doneness levels.
 - ◎Stainless steel body, durable, corrosion-resistant, and easy to clean
 - ◎Fast preheating to shorten waiting time
 - ◎Equipped with over-temperature protection, insulated handle, and working status indicators.
 - ◎Suitable for various settings: restaurant kitchens, food stalls, and fast-casual steak outlets



Model Table

产品规格表



产品型号 Model	EG-0027	EG-0028
名称 Name	单头全自动牛排机 Single-Head Fully Automatic Steak Grill	双头全自动牛排机 Dual-Head Fully Automatic Steak Grill
产品尺寸 Product Size WxDxH (mm)	330x480x350	680x580x350
烹饪区域 Cooking Area WxDxH (mm)	/	/
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	3.2KW	3.2KW*2
控制方式 CTL	智能操控 Smart Control	智能操控 Smart Control
预存菜单 Menu No.	5	5
防水等级 IPRating	IPX3	IPX3
温度范围 Temperature range	50~220°C	50~220°C
包装尺寸 Packing Size WxDxH (mm)		
净重 Net Weight (kg)		
毛重 Gross Weight (kg)		

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数仅供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

保温展示柜

WARM FOOD DISPLAY CABINET



功能特点 | Features

- ◎内置恒温系统，口感不易流失
- ◎分层存放，大容量更实用
- ◎透明展示，一目了然，商品可视化展示
- ◎循环加热结构，让内部热量分布更均匀
- ◎可调温区30~80℃，适配多种食材
- ◎不锈钢机身，易清洁抗油污
- ◎防雾玻璃设计，展示更清晰，门体不易起雾
- ◎多场景适用，炸鸡汉堡店、奶茶店、小吃店等

- ◎Built-in constant temperature system helps maintain food texture
- ◎Layered storage and large capacity make it more practical to use
- ◎Transparent display for clear, visible presentation of products
- ◎Multiple heat settings — flexibly adapt to various ingredients
- ◎Circulating heating system ensures more even heat distribution inside
- ◎Adjustable temperature range of 30—80°C, suitable for various types of food
- ◎Stainless steel body — oil-resistant and easy to clean
- ◎Anti-fog glass design for clearer display; doors resist fogging
- ◎Suitable for multiple settings, including fried chicken & burger shops, bubble tea stores, snack shops, and more



热风循环 · 温度更均匀

内置强力风扇驱动热空气循环，加快内部温度传递，让每层每个角落的食物都能均匀受热，保持口感一致。

Hot air circulation for more even temperature
Powerful built-in fan circulates hot air, ensuring even heating across all layers for consistent food texture

双开门设计 · 使用更灵活

左右两边的门均可独立开启，无论站在柜子哪一侧都能轻松取放食物，提高操作效率

Double-door design for more flexible use
Both left and right doors can be opened independently, allowing easy access to food from either side and improving operational efficiency



精准温控 · 食物口感更稳定

测温针实时监测柜内温度，快速响应温度变化，保持每层食物均匀受热，延长保温时间，防止干硬。

Precise temperature control for consistent food texture
The probe monitors cabinet temperature in real time, quickly adjusting to maintain even heat across all layers, keeping food warm and preventing dryness



Model Table
产品规格表



产品型号 Model	HW-DS-001	HW-DS-002	HW-DS-008	HW-DS-009
名称 Name	0.41米热风循环保温展示柜 0.41 m Hot Air Circulation Warming Display Cabinet	0.71米热风循环保温展示柜 0.71 m Hot Air Circulation Warming Display Cabinet	1.2米保温保湿展示柜 1.2 m Warming and Moisture-Retaining Display Cabinet	1.5米保温保湿展示柜 1.5 m Warming and Moisture-Retaining Display Cabinet
产品尺寸 Product Size WxDxH (mm)	410×640×740	710×640×740	1200×750×860	1500×750×860
内部区域 Interior area	/	/	/	/
电压/频率 Voltage & Frequency	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
额定功率 Rated Power (kw)	0.8KW	0.8KW	3.4KW	3.4KW
控制方式 CTL	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control
保温系统 Heating system	热风循环 Hot air circulation	热风循环 Hot air circulation	热风循环 Hot air circulation	热风循环 Hot air circulation
保湿功能 Moisture retention function	/	/	保湿 Moisture retention	保湿 Moisture retention
防水等级 IPRating	IPX3	IPX3	IPX3	IPX3
温度范围 Temperature range	30~85℃	30~85℃	30~85℃	30~85℃
包装尺寸 Packing Size WxDxH (mm)		740×660×750		
净重 Net Weight (kg)		24.5		
毛重 Gross Weight (kg)		30		



HW-DS-003	HW-DS-004	HW-DS-005	HW-DS-006	HW-DS-007
1.1米热风循环保温展示柜 1.1 m Hot Air Circulation Warming Display Cabinet	1.2米热风循环保温展示柜 1.2 m Hot Air Circulation Warming Display Cabinet	601款保温保湿展示柜 Model 601 Warming and Moisture-Retaining Display Cabinet	602款保温保湿展示柜 Model 601 Warming and Moisture-Retaining Display Cabinet	603款保温保湿展示柜 Model 603 Warming and Moisture-Retaining Display Cabinet
1100×630×730	1200×640×740	660×437×635	900×480×630	1200×480×610
/	/	/	/	/
220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
1.6KW	1.6KW	1.84KW	1.84KW	2.2KW
机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control	机械操控 Mechanical control
热风循环 Hot air circulation	热风循环 Hot air circulation	热风循环 Hot air circulation	热风循环 Hot air circulation	热风循环 Hot air circulation
/	/	保湿 Moisture retention	保湿 Moisture retention	保湿 Moisture retention
IPX3	IPX3	IPX3	IPX3	IPX3
30~85℃	30~85℃	30~85℃	30~85℃	30~85℃
1140×660×750	1240×660×750			
35	37.5			

智能腌制机
SMART MARINATING MACHINE



功能特点 | Features

- ◎自动调节腌制时间与温度，食材均匀入味
 - ◎多模式腌制，干湿料多种模式
 - ◎独特循环腌制技术，缩短腌制时间
 - ◎全程自动翻动，避免手工操作麻烦
- ◎大容量设计，一次可处理多份食材
 - ◎真空快速入味，负压腌制
 - ◎双向搅拌设计，入味更彻底
 - ◎不锈钢机身，抗油污、易清洁

- ◎ Auto-adjusting time and temperature for consistent flavor
- ◎ Multiple marinating modes — suitable for both wet and dry ingredients
- ◎ Unique circulation system for faster marination
- ◎ Full automatically — no manual work required
- ◎ Large-capacity design — handles multiple portions at once
- ◎ Vacuum rapid marination — negative pressure ensures fast flavor absorption
- ◎ Bidirectionally design ensures thorough marination
- ◎ Splash guard effectively prevents oil splatter for safer use
- ◎ Stainless steel body — oil-resistant and easy to clean



Model Table

产品规格表

产品型号 Model	滚筒容量 Drum capacity	额定功率 Rated power	额定电压 Rated voltage	定时控制 Timer control	真空功能 Vacuum Function	双向旋转 Two-way rotation	滚筒尺寸 Drum dimensions ØxHxL (mm)	产品尺寸 Product Size WxDxH (mm)
YPC-4A	38L	90W	220V/50Hz	100min	支持Supported	支持Supported	300×250×325	750×410×830
YPC-4A-B	38L	240W	220V/50Hz	100min	支持Supported	支持Supported	380×340×328	750×410×830
YPC-1A	45L	90W	220V/50Hz	100min	支持Supported	支持Supported	380×340×375	860×460×935
YPC-1A-B	45L	240W	220V/50Hz	100min	支持Supported	支持Supported	380×340×375	860×460×935
YPC-6A	60L	180W	220V/50Hz	100min	支持Supported	支持Supported	445×412×406	880×490×950
YPC-6A-B	60L	330W	220V/50Hz	100min	支持Supported	支持Supported	445×412×406	880×490×950
YPC-8A	80L	220W	220V/50Hz	100min	支持Supported	支持Supported	475×440×475	955×540×1000
YPC-8A-B	80L	350W	220V/50Hz	100min	支持Supported	支持Supported	475×440×475	955×540×1000
YPC-15A	150L	750W	220V/50Hz	100min	支持Supported	支持Supported	600×580×602	1115×600×1150
YPC-15A-B	150L	900W	220V/50Hz	100min	支持Supported	支持Supported	600×580×602	1115×600×1150

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.


燃气款美式炸炉

AMERICAN STYLE GAS DEEP FRYER



功能特点 | Features

- ◎ 高效燃气加热，升温快回温稳
- ◎ 深槽冷区，炸油更干净
- ◎ 独立温控，灵活7档调节火力
- ◎ 加厚不锈钢机身，耐用易清洁
- ◎ 灵敏探温针，精准控制稳定温度
- ◎ 多容量可选，满足多种店型
- ◎ High-efficiency gas heating for fast heat-up and stable recovery
- ◎ Deep-cold-zone design keeps frying oil cleaner
- ◎ Independent temperature control with 7 flexible heat levels
- ◎ Thickened stainless-steel body, durable and easy to clean
- ◎ Sensitive temperature probe for precise and stable temperature control
- ◎ Reversible heating element design for easy cleaning of the oil tank bottom
- ◎ Multiple capacity options to suit different store sizes

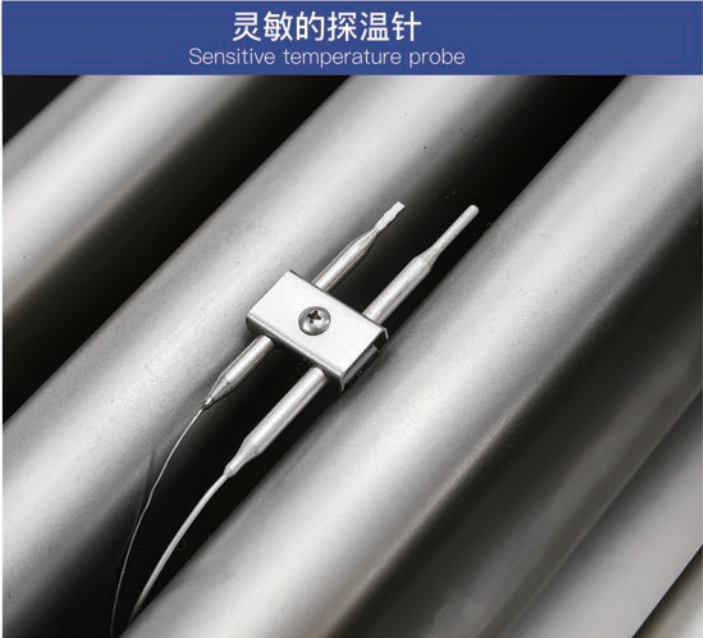

Model Table
产品规格表




产品型号 Model	GF3	GF4	GF5
名称 Name	24L单槽美式燃气款立式炸炉 24L American Style Free Standing Single-Tank Gas Fryer	34L单槽美式燃气款立式炸炉 34L American Style Free Standing Single-Tank Gas Fryer	44L单槽美式燃气款立式炸炉 44L American Style Free Standing Single-Tank Gas Fryer
产品尺寸 Product Size WxDxH (mm)	393x775x1145	393x775x1145	533x775x1145
烹饪区域 Cooking Area WxDxH (mm)	357x540x215	357x540x215	497x643x215
容量 Capacity (Liter)	24L	34L	44L
气源种类 Gas type	LNG/LPG	LNG/LPG	LNG/LPG
BTU/hr	90000	120000	150000
控制系统 Control system	西特710比例阀 Sit 710 Gas Valve	西特710比例阀 Sit 710 Gas Valve	西特710比例阀 Sit 710 Gas Valve
火排数量 Number of burners	3	4	5
防水等级 IP Rating	IPX4	IPX4	IPX4
温度范围 Temperature range	120~195°C	120~195°C	120~195°C
包装尺寸 Packing Size WxDxH (mm)			
净重 Net Weight (kg)			
毛重 Gross Weight (kg)			

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数仅供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

美式燃气台式炸炉

AMERICAN-STYLE GAS COUNTERTOP FRYER

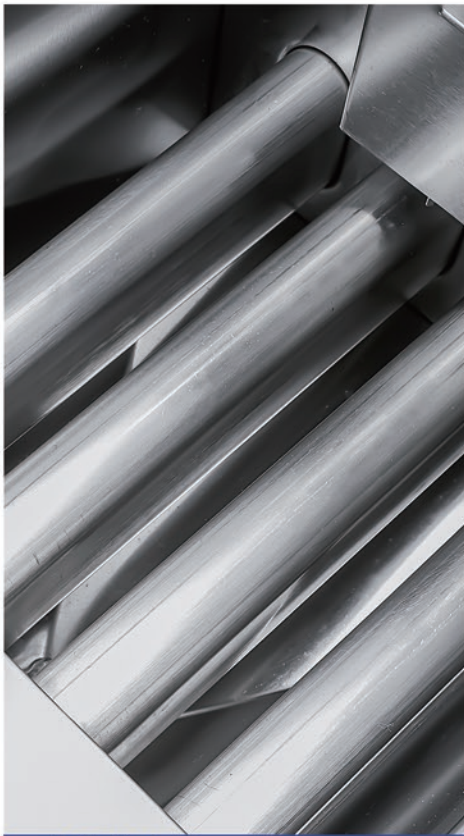

高效能火排 High-efficiency burner



液涨式温控 Liquid-expansion thermostat



放油阀 Oil drain valve

功能特点 | Features

- ◎ 高效燃烧系统，升温迅速
 - ◎ 高功率直管火排设计，炸制节奏更流畅
 - ◎ 液涨式温控调节火力，维持稳定油温
 - ◎ 多档火力调节，灵活适配多种食材
 - ◎ 加厚钢材打造油缸，耐高温、耐腐蚀
 - ◎ 不锈钢机身，易清洁抗油污
 - ◎ 多容量可选，满足不同场景需求
 - ◎ 防滑脚垫设计，工作稳定安全
- ◎ High-efficiency combustion system for rapid heating
 - ◎ High-power straight-tube burner design for smoother frying performance
 - ◎ Liquid-expansion thermostat regulates heat and maintains stable oil temperature
 - ◎ Multiple heat settings — flexibly adapt to various ingredients
 - ◎ Thickened steel oil tank — high-temperature and corrosion resistant
 - ◎ Stainless steel body, sturdy and corrosion-resistant
 - ◎ Stainless steel body — oil-resistant and easy to clean
 - ◎ Multiple capacities available to suit different needs

Model Table

产品规格表



产品型号 Model	GF-0030	GF-0031
名称 Name	单槽台式燃气炸炉 Single-Tank Countertop Gas Fryer	双槽台式燃气炸炉 Double-Tank Countertop Gas Fryer
产品尺寸 Product Size WxDxH (mm)	320×652×562	620×673×562
烹饪区域 Cooking Area WxDxH (mm)	260×353×150	260×353×150*2
容量 Capacity (Liter)	18L	18L*2
气源种类 Gas type	LPG/NG	LPG/NG
额定气压 Rated gas pressure	2800Pa	2800Pa
控制方式 CTL	液涨式温控 Liquid-expansion thermostat	液涨式温控 Liquid-expansion thermostat
可选火排 Optional burner rows	直管火排 Straight-tube burner	直管火排 Straight-tube burner
防水等级 IP Rating	IPX3	IPX3
温度范围 Temperature range	50~200°C	50~200°C
包装尺寸 Packing Size WxDxH (mm)	720×380×590	720×700×590
净重 Net Weight (kg)	18.65	34.45
毛重 Gross Weight (kg)	20.07	39.55

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数仅供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

燃气扒炉系列

GAS GRIDDLES


功能特点 | Features

- ◎高功率燃烧系统，升温快、火力更稳定
 - ◎铸铁煎板，均匀导热不挑区
 - ◎多区独立控温，同时处理不同食材
 - ◎加厚煎板蓄热强，频繁下食材也不易掉温
 - ◎节能燃烧结构，热效率更高
 - ◎前置接油槽，收集油渣油污，清洁更轻松
 - ◎防溅挡板，有效防油溅使用更安全
 - ◎不锈钢机身，抗油污、抗腐蚀耐用易清洁
- ◎ High-power burner system for fast heating and stable heat output
 - ◎ Cast-iron griddle plate ensures even heat distribution without hot or cold spots
 - ◎ Dual/Multiple zones allow cooking different foods at once
 - ◎ Thick griddle retains heat, preventing temperature drop during heavy use
 - ◎ Energy-efficient burner design for higher thermal efficiency
 - ◎ Front-positioned oil tray collects grease and food residue
 - ◎ Splash guard effectively prevents oil splatter for safer use
 - ◎ Stainless steel body—resistant to grease and corrosion, durable and easy to clean




Model Table

产品规格表

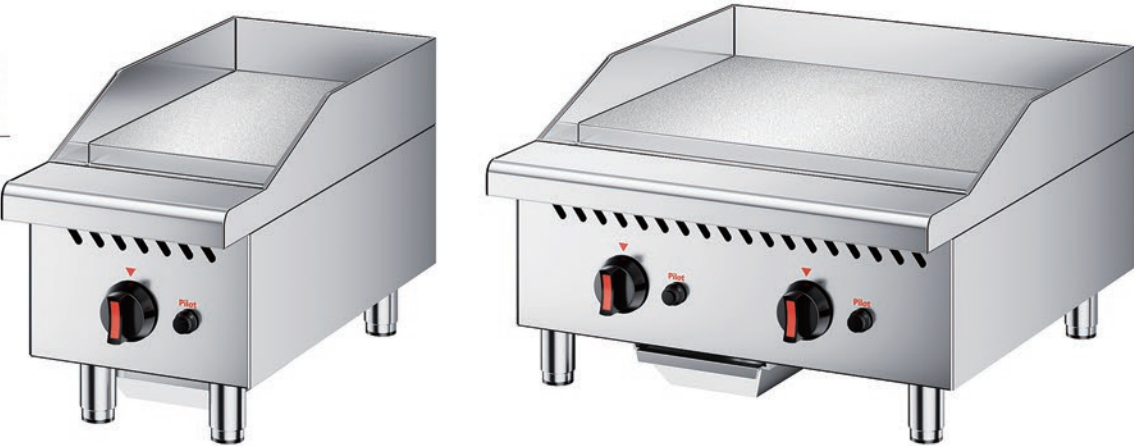

产品型号 Model	GG-0011	GG-0012
名称 Name	单温控燃气扒炉 Single Temperature-Control Gas Griddle	双温控燃气扒炉plus Dual Temperature-Control Gas Griddle
产品尺寸 Product Size WxDxH (mm)	550×480×380	730×530×380
煎板尺寸 Griddle Plate Size(mm)	548×350	728×400
煎板厚度 Griddle Plate Thickness(mm)	8MM	8MM
气源种类 Gas type	LPG/NG	LPG/NG
额定气压 Rated gas pressure	2800Pa	2800Pa
控制方式 CTL	电池脉冲点火Battery Pulse Ignition	电池脉冲点火Battery Pulse Ignition
火力档位 Heat Setting	4	4
防水等级 IPRating	IPX3	IPX3
温度范围 Temperature range	50~300°C	50~300°C
包装尺寸 Packing Size WxDxH (mm)		815×560×380
净重 Net Weight (kg)		
毛重 Gross Weight (kg)		

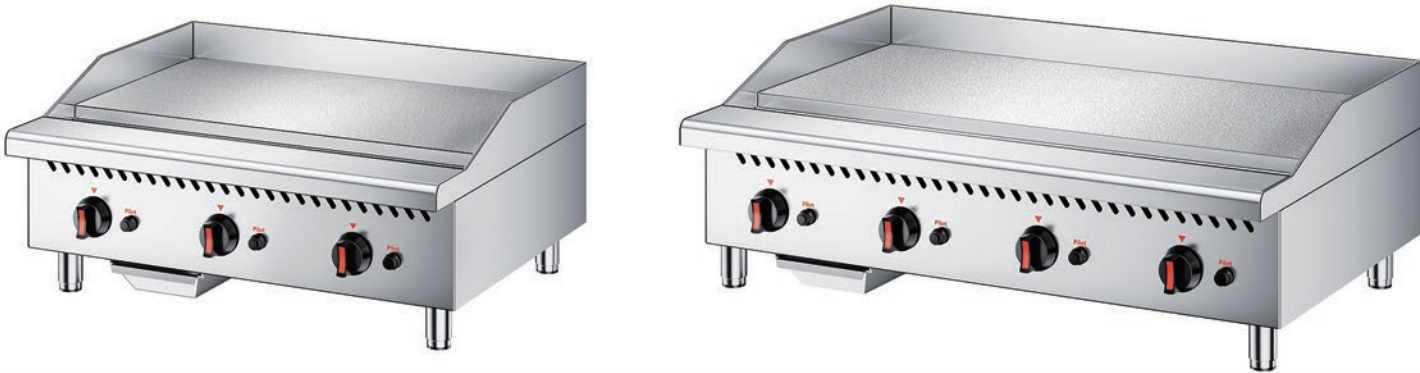

GG-0013	GG-0014
三温控燃气扒炉 Tri Temperature-Control Gas Griddle	四温控燃气扒炉 Quad Temperature-Control Gas Griddle
920×690×440	730×455×230
/	/
16MM	16MM
LPG/NG	LPG/NG
2800Pa	2800Pa
电池脉冲点火Battery Pulse Ignition	电池脉冲点火Battery Pulse Ignition
4	4
IPX3	IPX3
50~300°C	50~300°C

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

燃气立式豪华炉


LUXURY FREE STANDING GAS COOKER



高效火排孔阵列 Efficient burner hole array



废油收集孔设计 Integrated Oil Drain Port

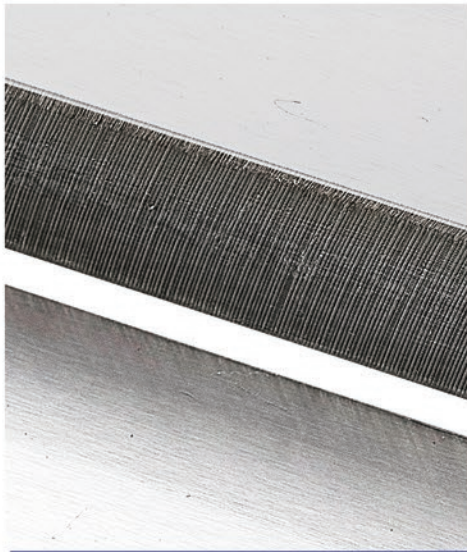

19MM加厚煎板 19mm Thickened Griddle Plate

功能特点 | Features

- ◎高功率燃烧系统，升温快、火力更稳定
- ◎底部柜体式设计，可储物
- ◎独立双控温，可分区烹饪
- ◎19mm加厚煎板蓄热强，不易掉温
- ◎节能燃烧结构，热效率更高
- ◎前置接油槽，收集油渣油污，清洁更轻松
- ◎防溅挡板，有效防油溅使用更安全
- ◎不锈钢机身，抗油污、抗腐蚀耐用易清洁

- ◎ High-power burner system for fast heating and stable heat output
- ◎ Under-Counter Cabinet for Storage
- ◎ Independent Dual Temperature Control with Zoned Cooking
- ◎ 19mm Heavy-Duty Griddle Plate with Excellent Heat Retention
- ◎ Energy-efficient burner design for higher thermal efficiency
- ◎ Front-positioned oil tray collects grease and food residue
- ◎ Splash guard effectively prevents oil splatter for safer use
- ◎ Stainless steel body—resistant to grease and corrosion, durable and easy to clean

Model Table

产品规格表



产品型号 Model	GG-0009	GG-0010	GR-013
名称 Name	双温控燃气立式扒炉 Free Standing Dual Temperature-Control	双温控燃气立式烧烤机 Dual Temperature-Control Gas Grill	四温控燃气立式煲仔炉 Free Standing Quad Temperature-Control Gas Stove Burner
产品尺寸 Product Size WxDxH (mm)	730×530×950	730×530×950	730×530×950
热量范围 Griddle Plate Size(mm)	728×400	728×400	728×400
热量方式 Griddle Plate Thickness(mm)	煎板Griddle Plate19MM	烧烤架Grill Rack	支锅架Pot Support 4pcs
气源种类 Gas type	LPG/NG	LPG/NG	LPG/NG
额定气压 Rated gas pressure	2800Pa	2800Pa	2800Pa
控制方式 CTL	电池脉冲点火Battery Pulse Ignition	电池脉冲点火Battery Pulse Ignition	电池脉冲点火Battery Pulse Ignition
火力档位 Heat Setting	4	4	4
防水等级 IPRating	IPX3	IPX3	IPX3
温度范围 Temperature range	50~300℃	50~300℃	50~300℃
包装尺寸 Packing Size WxDxH (mm)			
净重 Net Weight (kg)			
毛重 Gross Weight (kg)			

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数仅供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

立式汉堡机

FREE STANDING



高效加热，快速成型

Efficient heating for fast patty formation
受热均匀，汉堡饼熟度一致，高温速热，缩短制作时间，提高出餐效率
Even heat distribution ensures consistent patty cooking; rapid high-temperature heating shortens preparation time and boosts output efficiency

功能特点 | Features

- ◎ 高效成型，高产出缩短制作时间
- ◎ 温度范围 50~230℃，高温自由调节
- ◎ 耐用不锈钢机身坚固耐用，易清洁
- ◎ 热效率高，结构合理，快速加热
- ◎ 操作简单安全，机械开关控制，直观易懂
- ◎ 结构简洁，拆装方便，日常维护轻松
- ◎ Efficient forming, high output, reducing production time
- ◎ Temperature range 50—230℃, freely adjustable for high and low heat
- ◎ Durable stainless steel body — sturdy, long-lasting, and easy to clean
- ◎ High thermal efficiency, well-designed structure, rapid heating
- ◎ Easy and safe to operate, controlled by a mechanical switch, intuitive and user-friendly
- ◎ Simple structure, easy to assemble and disassemble, hassle-free daily maintenance

Model Table

产品规格表



产品型号 Model	SHM-130	SHM11	SHM-430
名称 Name	立式迷你汉堡机 Free Standing Mini Burger Maker	立式汉堡机 Free Standing Burger Maker	加宽立式汉堡机 Widened Free Standing Burger Maker
产品尺寸 Product Size WxDxH (mm)	340×350×610	460×350×610	645×350×610
放包口尺寸 Bun Slot Size WxD (mm)	130×100	260×100	445×105
出包数量 Buns per Batch	700组/H	1400组/H	2100组/H
电压/频率 Voltage / Frequency	AC220-240V/50Hz	AC220-240V/50Hz	AC220-240V/50Hz
额定功率 Rated Power	1200W	2000W	2700W
控制类型 Control Type	机械开关Mechanical Switch	机械开关Mechanical Switch	机械开关Mechanical Switch
温度范围 Temperature Range	50~230℃	50~230℃	50~230℃
包装尺寸 Packing Size WxDxH (mm)	400×350×650	520×350×650	705×350×650
净重 Net Weight (kg)	17.4	23.5	33
毛重 Gross Weight (kg)	19.2	25.25	38.5

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

高效裹粉台

HIGH-EFFICIENCY BREADING TABLE



宽敞操作台面，裹粉更方便
Spacious worktop for easier coating
多功能台面，可同时进行裹粉、调味和分装。
标准化操作流程，提高出品一致性
Multi-functional worktop for coating, seasoning, and
portioning; standardized workflow ensures consistent results

功能特点 | Features

- ◎ 不锈钢机身抗油抗腐蚀，易清洁更耐用
 - ◎ 大面积操作台预留足够空间，裹粉动作更顺畅
 - ◎ 分区操作设计湿料、干粉分离摆放
 - ◎ 高边沿防溅，有效减少裹粉飞散
 - ◎ 稳固结构，加厚支撑架，承重力强
 - ◎ 可拆卸料盆，裹粉盆拆装方便，清洗更快捷
 - ◎ 高效工作流程，缩短备餐时间
- ◎ Stainless steel body — oil-resistant, corrosion-resistant, easy to clean, and built for durability
 - ◎ Large work surface provides ample space for smoother breading operations
 - ◎ Separated zones for organizing wet and dry ingredients
 - ◎ Raised edge design reduces splashing and prevents breading from scattering
 - ◎ Stable structure with reinforced support frame for strong load-bearing capacity
 - ◎ Removable bins — easy to detach for faster, more convenient cleaning
 - ◎ Bidirectional stirring design ensures thorough marination
 - ◎ Efficient workflow that shortens preparation time



配件齐全 Full set of accessories

Model Table

产品规格表

产品型号 Model	HW-BT-001	HW-BT-002
名称 Name	手动80款裹粉台 Manual 80-Style Breading Table	手动100款裹粉台 Manual 100-Style Breading Table
产品尺寸 Product Size WxDxH (mm)	800x670x980	1000x670x980
方篮尺寸 Square Basket Size(mm)	300x250x100	430x370x150
方盆尺寸 Square Pan Size(mm)	430x370x150	/
圆篮尺寸 Round Basket Size(mm)	200x150	/
圆盆尺寸 Round Pan Size(mm)	300x150	/
包装尺寸 Packing Size WxDxH (mm)		
净重 Net Weight (kg)		
毛重 Gross Weight (kg)		

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.